
Antirust Primer 400 ml (V400/PAST)

ANTIRUST PRIMER - This is the primer to be applied before painting, for the perfect adhesion of any spray glaze on the surfaces. Protects against rust. Also suitable as a filler for small imperfections and scratches. Carefully clean the surface before application and shake the can vigorously. It takes at least 24/48 hours for overpainting. After use, spray for 2/3 seconds with the can upside down to avoid clogging the dispenser.

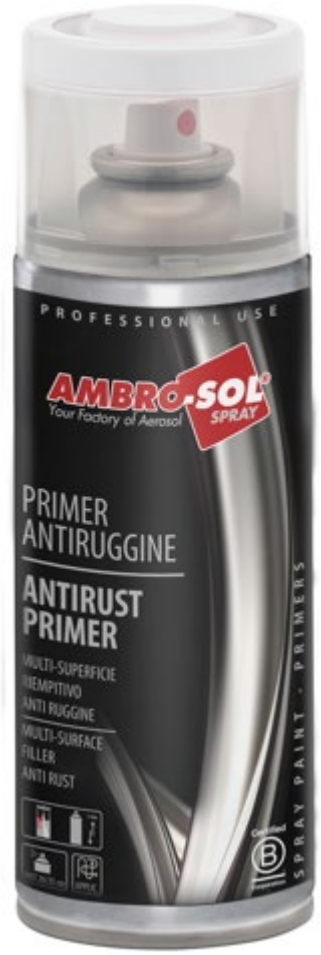

Technical specifications:

Quantity	400 ml
Packaging	6 pcs.
Appearance	Cylinder containing liquid under pressure
Chemical nature	Acrylic
Color	Vario – Colour chart
Odor	Solvent characteristic
Relative density at 20°C	0.76 ÷ 0.80 Kg/L
Flash point	Inf. 0° C extremely flammable
Lettering on the back of the cylinder	Barcode, Production date, Product name
Pressure	at 20°C 5.5 ± 0.5 bar
Pressure	at 50°C 8.0 ± 0.5 bar
Viscosity Ford Cup 4	From 10" to 15"
Dry residue in cylinders	12% to 15%
Brilliance	From 7 to 20 Gloss (60° angle glossmeter)
Thickness 1 crossed hand	13-24 Microns
Drying times T=20°C	Dust-free 15-30 minutes
	Dry to the touch 15-30 minutes
	Dry in depth full 22 hours
	24/48 hour overpainting interval
Patented child-proof safety cap	
Token and color reference ring	

FIELDS OF APPLICATION
Metal surfaces such as iron, aluminum, steel.
Apply at room temperature:
Min. 5°C - Max. 35°C.

Product subject to C.O.V. Directive
Subcategory: Special Finishes
VOC Limit Value: 840 g/Litre


USING ADVICES:
Clean the surface to be treated thoroughly: the surface must be completely dry.
Ferrous surfaces: Antirust enamels V400PAST.1, V400PAST.1/ECO, V400PAST.9, V400PAST.10, V400PAST.12.

Ambro-Sol – Via per Pavone del Mella, 21 – 25020 - Cigole (BS) Italy - www.ambro-sol.com - info@ambro-sol.com

Ambro-Sol is a registered trademark - All rights reserved - Reproduction, even partial, is prohibited.

HOW TO USE:

- Shake the tank vigorously for at least 1 minute, until you feel the internal marbles move freely. It is also advisable to shake the cylinder occasionally even during use;
- Carefully clean the surface before application;
- Test in a hidden area to check compatibility with the substrate to be painted.

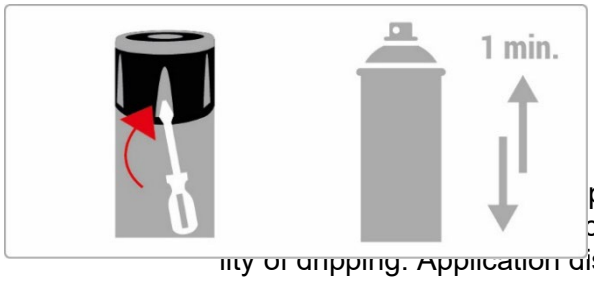


Break the security seal to open the cap.

prove coverage
ce the possibi-
ity of dripping. Application distance about
20/30 cm;



nd hori-
a third



Erogazione: Lineare
Dispensing: Linear
Quantità prodotto erogato: Media
Quantity product dispensed: Medium
Tipo di erogazione: Cono medio
Dispensing type: Medium cone
Tipo di spruzzo: Nebulizzato
Spray type: Nebulized

r 2/3
o avoid

- After 48 h, proceed with the normal use of the painted piece.

STORAGE METHODS

Before use: Store the product in a dry place and do not store it at temperatures below 5°C and above 45°C, after use keep the containers tightly closed. If stored in the original packaging, the product can be stored for 24 months (warranty). The product is not subject to expiration.
After first use: Store in a cool, dry place, away from heat sources. Keep out of reach of children.

This information, although considered reliable, must be considered indicative. Their use does not imply any liability on our part, including infringement of any patents or licenses. It is the responsibility of users to check the suitability of the product for the specific use in advance.

CONSULT THE PRODUCT SAFETY DATA SHEET BEFORE USE

Ambro-Sol – Via per Pavone del Mella, 21 – 25020 - Cigole (BS) Italy - www.ambro-sol.com - info@ambro-sol.com

Ambro-Sol is a registered trademark - All rights reserved - Reproduction, even partial, is prohibited.